Zones

Adds 3 zones.

Compatible Panel

Use with iWD3P panels. Zoning panel automatically detects the iWD3X Expansion Panels and adjusts the number of zones being used.

Connection

Connects to the iWD3P Zoning Panel or another iWD3X Expansion Panel using the 10-pin cable provided.

Compatible Thermostats

Gas/electric thermostats. 24VAC, battery powered or power sharing thermostats.

Compatible Dampers

24VAC power close/spring open, power open/spring closed, power open/close or modulating.

Optional Sensors

Discharge and outside air temperature sensors and duct pressure sensor.

LED Display

Displays zone call and damper status.

Power

20 to 30VAC, 10VA not including damper power requirements. Use 40-100VA, 24VAC, 60Hz Transformer, NEC Class 2.

Operating Temperatures

-20 to 175°F.

Case Size

9.70 x 7.65 x 1.63 inches.

Features


All options and settings digitally set.

Staging using thermostat or digitally set on-panel Timer. Limit staging using demand.

Multi-color LEDs indicate status of zone thermostats, HVAC equipment, dampers and panel.

Digitally configure and display all panel options and status. Select type of thermostat for each zone.

Select either open/close or modulating dampers.

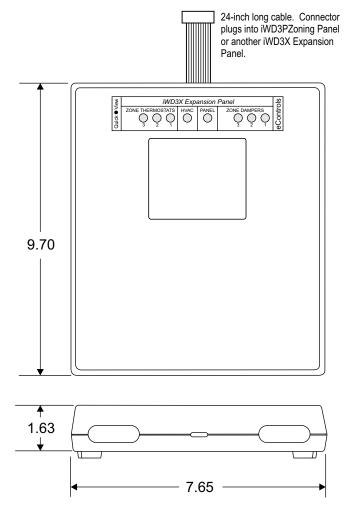

SUBMITTAL FORM

Model:	iWD3X
Quantity:	
Date:	
Job:	
Location:	
Architect:	
Engineer:	
Contractor:	
Buyer:	
PO#:	



eControls, Inc. 26072 Merit Circle #110 / Laguna Hills, CA 92653 949-916-0945 Fax 949-458-8502 www.iZoneUS.com